


Product data sheet

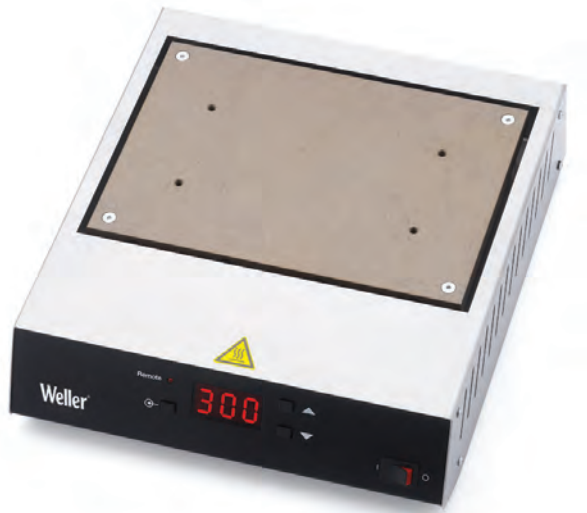

- Preheating plates
- WHP 1000 - 120 V - 850 Watt Digital Preheating Plate
- For rework of single sided PC board assemblies
- The heating plate ramps up the assembly from below using direct contact
- Precision temperature control / 150° F - 570° F (50° C - 300° C)
- Read and set temperatures are indicated digitally
- RS-232 Interface for connection to Weller hot air stations WHA 3000 or WX series soldering stations
- Heating surface 8.75" x 6.0" / 220 x 150 mm
- Thermocouple (Type K) input for temperature control at the component level

WHP 1000 Preheating plate

Product no.: WHP1000N

Dimensions L x W x H (mm)	254 x 280 x 70
Dimensions L x W x H (inches)	10 x 11 x 2.76
Weight (approx.) in kg	---
Voltage	120 V
Power	1000 W
Channels	---
Temperature range (depends on tool) °C	66 - 299
Temperature range (depends on tool) °F	150 - 570
Temperature accuracy °C	---
Temperature accuracy °F	---
Temperature accuracy for hot air °C	---
Temperature accuracy for hot air °F	---
Temperature stability °C	---
Temperature stability °F	---
Equipotential bonding socket	---
Display	---
Additional vacuum pump	---
Max. hot air flow rate l/min (depends on tool)	---
Capacity l/min	---
Max. vacuum	---
Interface	1 x RS232, 1 x thermocouple type K